



## Low Refractive Index coating liquid

**FLUOROSURF®**

- FLUOROSURF FG-5040 forms film of low refractive index effectively decreasing reflected light and increasing the transmitted light.
- By coating FLUOROSURF FG-5040, transmitted light increases 3 to 4%.  
When it is used for a complicated optical system, transmitted light is increased several ten percent in total.
- Low toxicity non-flammable solvent is used for safe and simple coating.  
This product is not subject to the PRTR Law, Fire Defense Law and Industrial Safety and Health Law.

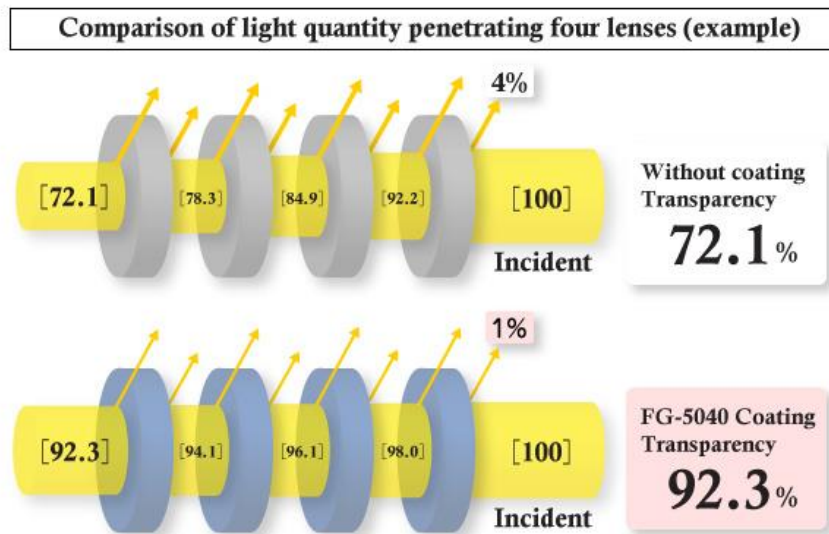

UV Transparency (%) **Transparency data of FG-5040**

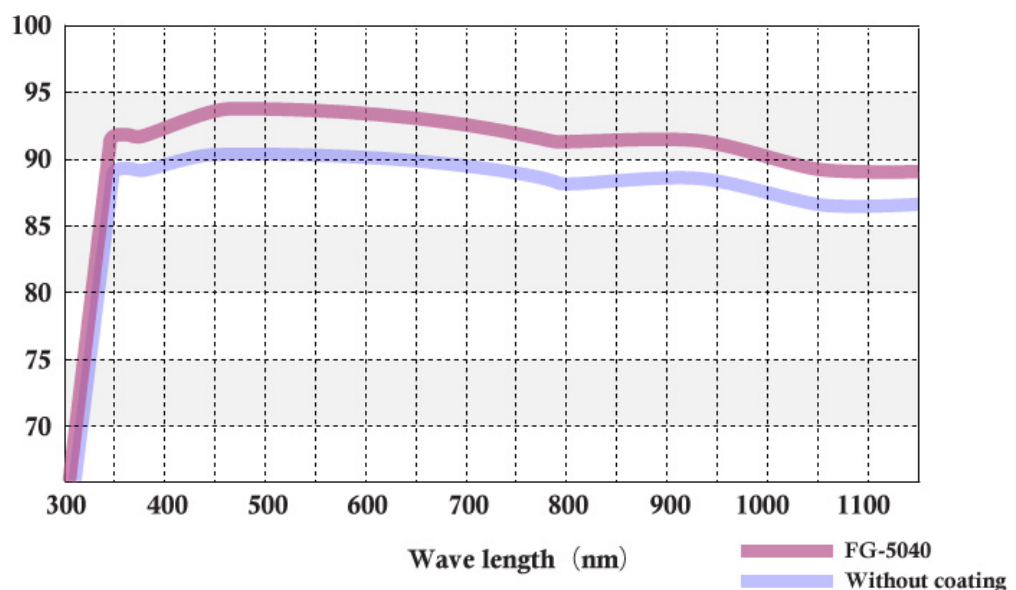

## Product Line Up for Low refractive index coating

Product Model No.	Solvent	Feature
FG-5040H-0.5	Non flammable	Film thickness 0.1micron meter. Refractive Index =1.39 Film Hardness = 3H
FS-702X Series	flammable	Additive for UV hard coat agent.